
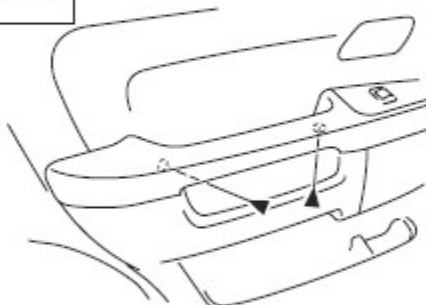


Rear Door Panel Removal/Installation (cont'd)

5. Remove the screws from under the armrest.

Fastener Locations

►: Screw, 2




6. Remove the switch panel (A).

- Insert a flat-tip screwdriver wrapped with protective tape through a hole under the armrest, and push up the back of the panel to release the rear hook (B).
- Pull out along the edge of the panel to release the hooks (C) and clip.
- Disconnect the power window switch connector (D).

Fastener Location

►: Clip, 1

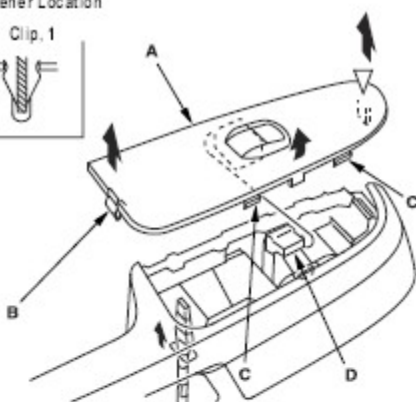

7. Remove the door panel (A) with as little bending as possible to avoid creasing or breaking it.

- Release the clips that hold the door panel with a commercially available trim pad remover (B).
- Starting at the rear, pull the door panel upward, then release the lock knob (C).

Fastener Locations

►: Clip, 8

